

Barry Stoodley Pty Ltd

S SERIES SUPERWINCH

S3000



3,000lb./1,361kg
1430200 12V DC
1430300 24V DC

SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
RATED LINE PULL 3,000lb. (1,361kg)
MOTOR 1.3hp
BRAKE DYNAMIC & MECHANICAL
WIRE ROPE 4.8mm x 18.2m
DIMENSIONS 383mmL x 183mmD
x 152mmH

S4000



4,000lb./1,814kg
1440200 12V DC
1440300 24V DC

SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
RATED LINE PULL 4,000lb. (1,814kg)
MOTOR 1.8hp
BRAKE DYNAMIC & MECHANICAL
WIRE ROPE 5.6mm x 18.2m
DIMENSIONS 383mmL x 183mmD
x 152mmH


S5000



5,000lb./2,268kg
1450200 12V DC
1450300 24V DC

SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
ROLLER FAIRLEAD
RATED LINE PULL 5,000lb. (2,268kg)
MOTOR 2.1hp
BRAKE DYNAMIC & MECHANICAL
WIRE ROPE 6.4mm x 15.2m
DIMENSIONS 383mmL x 183mmD
x 152mmH

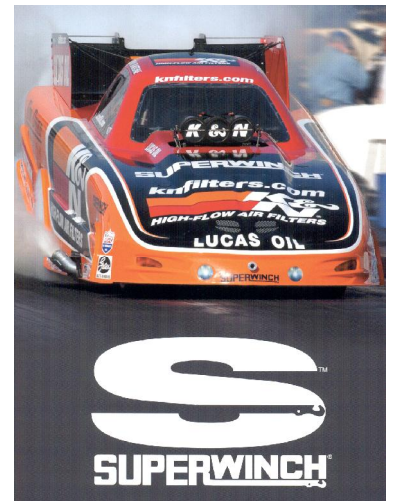

Barry Stoodley Pty Ltd

X & ATV SERIES SUPERWINCH



X1



2,000lb./907kg

1101 12V DC

1117 24V DC

SPECIFICATIONS:

REMOVEABLE SWITCH
RATED LINE PULL 2,000lb. (907kg)
MOTOR 1.3hp
BRAKE DYNAMIC
WIRE ROPE 4.7mm x 7.62m
DIMENSIONS 325mmL x 137mmD
x 146mmH

ATV1800



1118200
12VDC With Freespooling

1,800lb./816kg

1118200 12V DC

SPECIFICATIONS:

SEALED REMOTE MOUNTING SWITCH
RATED LINE PULL 2,000lb. (907kg)
MOTOR 0.71hp
BRAKE DYNAMIC & MECHANICAL
WIRE ROPE 4mm x 15.1m
DIMENSIONS 317.5mmL x 100mmD
x 104mmH

T2000



1220200
12VDC With Freespooling

2,000lb./1043kg

1220200 12V DC

SPECIFICATIONS:

SEALED REMOTE MOUNTING SWITCH
RATED LINE PULL 2,000lb. (1043kg)
MOTOR 0.71hp
BRAKE DYNAMIC & MECHANICAL
WIRE ROPE 4mm x 15.2m
DIMENSIONS 317.5mmL x 100mmD
x 104mmH

X2



3,000lb./1,361kg

1201 12V DC

1213 24V DC

SPECIFICATIONS:

REMOVEABLE SWITCH
RATED LINE PULL 3,000lb. (1,361kg)
MOTOR 1.3hp
BRAKE DYNAMIC
WIRE ROPE 5.6mm x 12.2m
DIMENSIONS 325mmL x 156mmD
x 146mmH

ATV2300



1123200
12VDC With Freespooling

2,300lb./1,043kg

1123200 12V DC

SPECIFICATIONS:

SEALED REMOTE MOUNTING SWITCH
RATED LINE PULL 2,300lb. (1,043kg)
MOTOR 0.71hp
BRAKE DYNAMIC & MECHANICAL
WIRE ROPE 4.7mm x 18.2m
DIMENSIONS 317.5mmL x 100mmD
x 104mmH

ATV3000



1130200
12VDC With Freespooling

3,000lb./1,360kg

1130200 12V DC

SPECIFICATIONS:

SEALED REMOTE MOUNTING SWITCH
RATED LINE PULL 3,000lb. (1,360kg)
MOTOR 1.1hp
BRAKE DYNAMIC & MECHANICAL
WIRE ROPE 4.8mm x 15.1m
DIMENSIONS 322.6mmL x 110.7mmD
x 114.3mmH

Barry Stoodley Pty Ltd

HUSKY SERIES SUPERWINCH

HUSKY 10



2404

10,000lb./4,536kg

2404 12V DC

2405 24V DC

SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
ROLLER FAIRLEAD
RATED LINE PULL 10,000lb. (4,536kg)
MOTOR 4.2hp Series Wound
GEARING WORM DRIVE
WIRE ROPE 10mm x 27.4m
DIMENSIONS 627mmL x 248mmD
x 226mmH

HUSKY 8



2401

8,500lb./3,856kg

2401 12V DC

SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
ROLLER FAIRLEAD
RATED LINE PULL 8,500lb. (3,856kg)
MOTOR 4.2hp Series Wound
GEARING WORM DRIVE
WIRE ROPE 7.9mm x 45.6m
DIMENSIONS 627mmL x 248mmD
x 226mmH

X9 9,000lb./4,082kg



1901C 12V DC

1902B 24V DC

WITH ROLLER FAIRLEAD

SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
ROLLER FAIRLEAD
RATED LINE PULL 9,000lb. (4,082kg)
MOTOR 4.2hp Series Wound
BRAKING ACTION AUTOMATIC IN-THE-DRUM
WIRE ROPE 7.9mm x 30.5m
DIMENSIONS 581mmL x 171mmD
x 168mmH



Barry Stoodley Pty Ltd

EP SUPER-DUTY RECOVERY WINCHES

EP9.0



9,000lb./4,082kg

09032 12V DC

09033 24V DC

SPECIFICATIONS:

REMOTE HAND-HELD SWITCH

ROLLER FAIRLEAD

RATED LINE PULL 9,000lb. (4,082kg)

MOTOR 4.6hp Series Wound

GEARING 3 STAGE PLANETARY

WIRE ROPE 8.3mm x 30.5m

DIMENSIONS 593mmL x 159mmD
x 181mmH

EP16.5



16,500lb./7,484kg

1516200 12V DC

1516300 24V DC

SPECIFICATIONS:

REMOTE HAND-HELD SWITCH

ROLLER FAIRLEAD

RATED LINE PULL 16,500lb. (7,484kg)

MOTOR 5.6hp 12V Series Wound

GEARING 3 STAGE PLANETARY

WIRE ROPE 11.1mm x 27.4m

DIMENSIONS 673mmL x 215.9mmD
x 284.5mmH

Barry Stoodley Pty Ltd

GP SERIES - GENERAL PURPOSE UTILITY WINCHES

GP1800

1,800 lb./816 kg



1318200
12VDC



SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
RATED LINE PULL 1,800lb. (816kg)
MOTOR 0.71hp
BRAKE DYNAMIC &
MECHANICAL
WIRE ROPE 4.8mm x 18.2m
DIMENSIONS 317.5mmL x 100mmD
x 104mmH

GP2300

2,300 lb./1043 kg



1323200
12VDC



STANDARD FEATURES

Powers Load IN and OUT

SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
RATED LINE PULL 2,300lb. (1,043kg)
MOTOR 0.71hp
BRAKE DYNAMIC &
MECHANICAL
WIRE ROPE 4.8mm x 18.2m
DIMENSIONS 317.5mmL x 100mmD
x 104mmH

GP3000

3,000 lb./1360 kg



1330200



SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
RATED LINE PULL 3,000lb. (1,360kg)
MOTOR 0.7hp
BRAKE DYNAMIC &
MECHANICAL
WIRE ROPE 4.8mm x 15.2m
DIMENSIONS 322.6mmL x 110.7mmD
x 114.3mmH

NEW

WIRELESS WINCH CONTROL DISTANCE HAS ADVANTAGES...

FREEDOM SWITCH

- ❑ Instant "ON" and "OFF" for immediate control no delay.
- ❑ Signal recognition up to 150 feet.
- ❑ Compact shielded antenna designed for easy remote mounting.
- ❑ Plug and play components ensure quick installation.
- ❑ Sealed tough and tight for all conditions.



Barry Stoodley Pty Ltd

240 VOLT SERIES SUPERWINCH SAC1000

5:1 Safety Factor



1,000lb./454kg

1050 240V AC 50/60hz



SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
RATED LINE PULL 1,000lb. (454kg)
MOTOR 0.6hp Series Wound
BRAKE DYNAMIC AND MECHANICAL
WIRE ROPE 4.7mm x 10m
DIMENSIONS 387mmL x 132mmD x 152mmH

AC2000

2,000lb./907kg

1723 230V AC 60hz



5:1 Safety Factor

SPECIFICATIONS:

REMOTE HAND-HELD SWITCH
RATED LINE PULL 2,000lb. (907kg)
MOTOR 1hp Capacitor Start TEFC
BRAKING ACTION AUTOMATIC IN-THE-DRUM
WIRE ROPE 7.9mm x 30.5m
DIMENSIONS 678mmL x 218mmD x 234mmH


**SUPERWINCH ALSO HAVE A LARGE RANGE OF
HYDRAULICALLY POWERED WINCHES.**



Barry Stoodley Pty Ltd

HYDRAULIC PLANETARY WINCHES


H20P H25P H30P

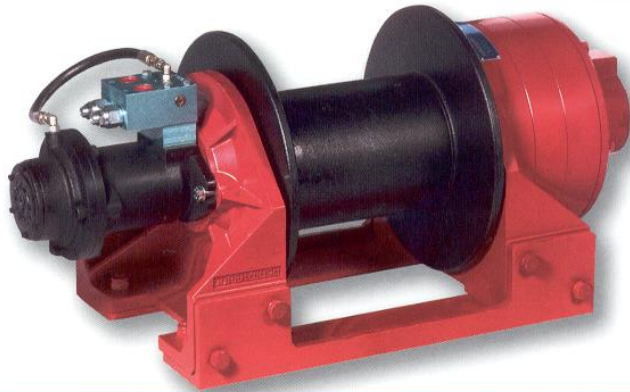

H20P P/N 5440B, 20,000 lbs. cap.
H25P P/N 5450B, 25,000 lbs. cap.
H30P P/N 5460B, 30,000 lbs. cap.

Dimensions:	H20P, H25P, H30P 37"L x 16"D x 16"H
Weight:	525 lbs. without wire rope
Gearbox:	Heavy duty, high efficiency 2 stage planetary with 36:1 gear ratio.
Brake:	Failsafe Multi-disc type, spring applied, hydraulic release.
Motor:	Rugged, high torque, low speed motor.
Freespooling:	Spring engaged, pneumatic / hydraulic release (manual available).
Drum:	Spheroidal graphite iron running in roller bearings.
Drum Capacity:	250' of 5/8", or 160' of 3/4" wire rope (wire rope not included).
Load Control Valve:	Fitted as standard.

H11P H13P H15P

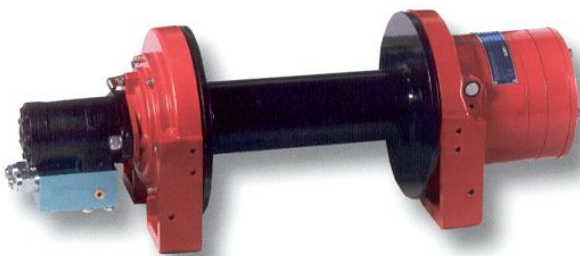

H11P 11,000 lbs. cap. P/N 5364 (P/N 5365with A.C.)
H11P 11,000 lbs. cap. Long Drum P/N 5366 (P/N5367 with A.C.)
H13P 13,000 lbs. cap. P/N 5370 (P/N 5371 with A.C.)
H13P 13,000 lbs. cap. Long Drum P/N 5372 (P/N 5373 with A.C.)
H15P 15,000 lbs. cap. P/N 5374 (P/N 5375 with A.C.)
H15P 15,000 lbs. cap. Long Drum P/N 5376 (P/N 5377 with A.C.)
A.C. = Air Clutch

Dimensions:	P/N 5364, 5570 and 5374 26.9"L x 10.2"D x 11.8"H
Dimensions:	P/N 5365, 5571 and 5375 26.9"L x 10.2"D x 10"H
Dimensions:	P/N 5366, 5572 and 5376 28.3"L x 10.2"D x 11.8"H
Dimensions:	P/N 5367, 5573 and 5377 28.3"L x 10.2"D x 10"H
Weight:	154 lbs. without wire rope and fairlead
Gearbox:	Heavy duty, high efficiency 2 stage planetary with 16:1 gear ratio.
Brake:	Integral, fail safe, automatically applied.
Motor:	Rugged, high torque, low speed motor.
Freespooling:	Spring engaged, manual release for rapid rope pay-out. Pneumatic freespool models available.
Drum:	Steel - STD.= DIA. 4" x 10" L Long Drum = DIA. 4" x 11.4"
Drum Capacity:	214/257' of 7/16" or 153/184' of 1/2" (wire rope not included).
Ease Of Mounting:	Can be side, foot or angle mounted, flatbed or low mount.
Load Control Valve:	Fitted as standard.

⚠ Winches are not intended for the transportation of people.
All units configured to metric bolt sizes.